

FREE STANDING A SERIES



BOREAS Free Standing A series Cabinets

BOREAS Server cabinets; designed for data centers, system rooms and telecommunication. They are the appropriate solution for your heavy equipment with strong structure and 1000kg loading capacity. They can be customized. Keeps your servers safe by working smoothly with air conditioning, cable management and other intelligent system applications.



Colour Options

RAL7035 Light Gray

RAL9005 Black







Cabinet Structure

A series cabinets reach the maximum strength with 45-degree vertical profiles fixed to special design monoblock welded bottom frame with steel screws. It is an ideal solution for your heavy equipment with up to 1000kg loading capacity.

The cabinets could be mounted side by side. They are network and server cabinets; suitable for office, system room, data centre, and cabling system installation. Compatible for all kind of 19" brands and models network and server equipments

During installation and while conducting routine maintenance and repair of installed equipment; removable side panels, rear door and the top plate allows to multiple easy access. Optimum depth for comfort cabling, server housing and equipment in the cabinets

Side panels, Front and rear doors are lockable and accessible with the same key. Front and rear doors could be detached and reversed to allow the door to open from the rear of the cabinet.

U Numbering

U numbering is printed with serigraphy to the mounting rails of the cabinet which helps to index of the devices housed in the cabinet.



Side Panels

The side panel model of A series cabinets allows easy removal of side panels during assembly, maintenance and repair. The cylindrical locking mechanism is used on the panels.

The Additional Side Panels

The additional side panels are fixed inside the cabinet which increases the strength of the cabinet and creates space for the installation of wiring and PDU accessories inside. Optionally, these panels could be perforated if additional ventilation is required in the cabinet.





Fan Module

The Standard version of A series fan module mounted to the top sheet from inside the cabinet. Pagoda style top cover is optional and could be mounted to the standard cabinet. Upon request, fan module can be assembled to the top sheet from outside the cabinet in this case pagoda style top cover is necessary.



Top Cable Entry

In 600 width standard cabinets, there is no cable entry on the top of the cabinet.

In 800 width standard cabinets have 2 cable entry on the top with the dimension of 60x300mm.





Rear Brushed Cable Entry

Brushed cable entry holes with 60mm*300mm dimensions are available on the top and bottom of the rear door for 26U and higher VEGA series free-standing cabinets as a standart..

Bottom Cable Entry

Base sheet model for 600-width cabinets; on unperforated base sheet model with slide cable entry hall. The cables entering the cabinet are clamped without being damaged because of the cable entry module with rubber edge and maximum sliding distance. Protection against undesirable substances and dust that could enter under the cabinet is provided.

In 800 width cabinets; additionally to the 600 width standard cabinets, two pieces 60 * 300 brushed cable entry halls are available that offers 3 different cable entry points from the base of the cabinet. If needed, the configuration can be changed.



Levelling Feet and Castors

Four levelling feet mounted to the bottom corner of the cabinet helps to adjust cabinet height and stability according to the ground condition. Castor set -2 castors with brakes-is optionally.




Side Horizontal Support Bar

Cabinets are supported by side horizontal support bar through depth and height directly proportional.





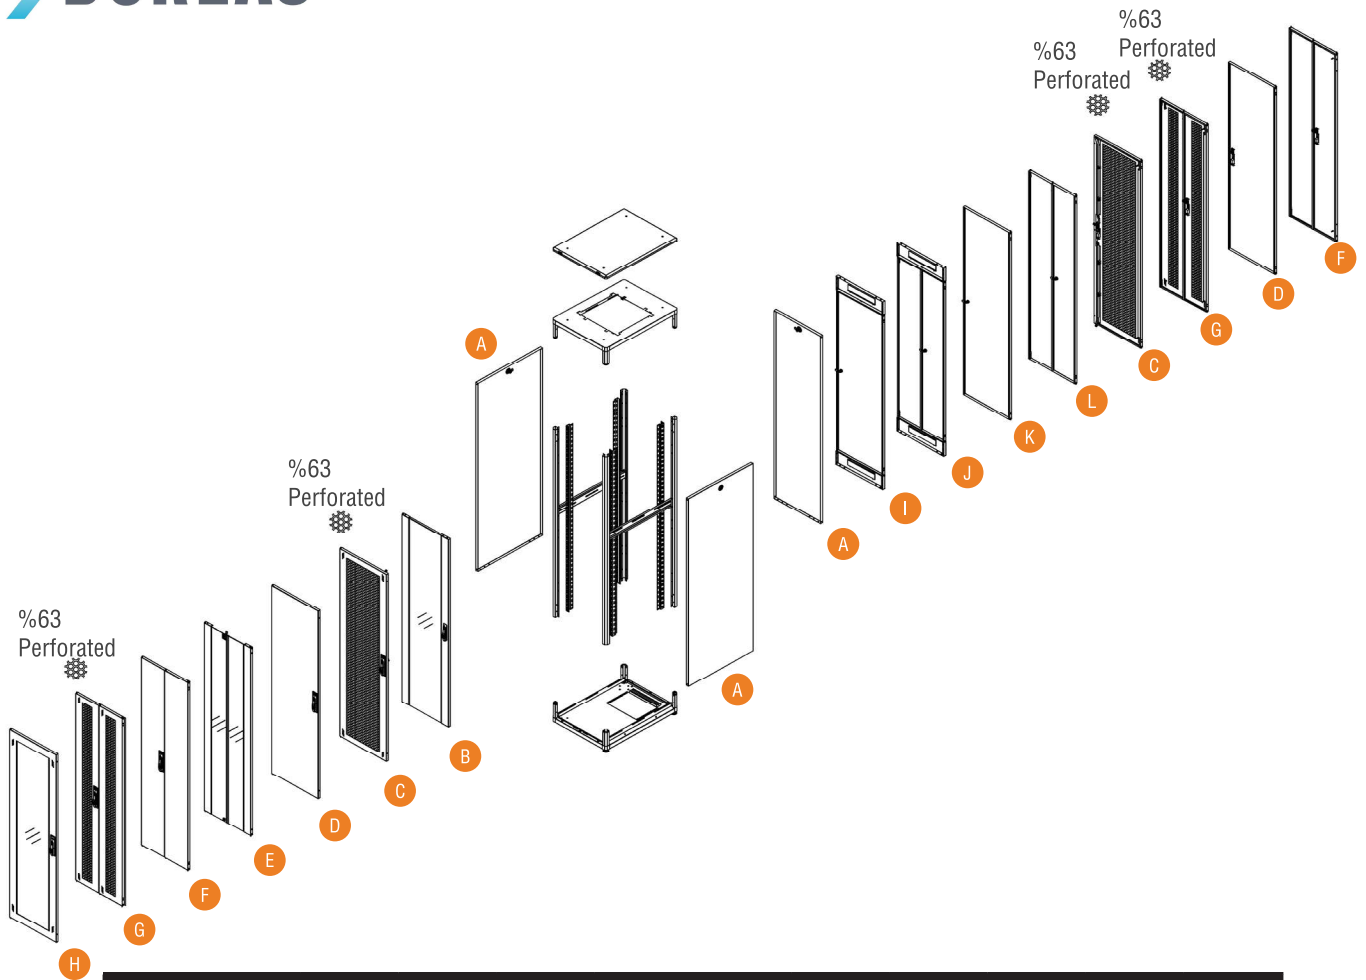


BR	DTA	42U	60	60	C1	B	K	A	A	A	X1
1	2	3	4	5	6	7	8	9	10	11	12

1. Company product coding system's initial character is BR that stands for BOREAS
2. Product Series Code. DTA stands for A Free-Standing,
3. Numeric Character defining the height of the cabinet. Depending on model differences, between 07 to 48 height variety available. U Height Alfanumeric Notation is fixed, not editable. 1U is 44.45mm.
4. The First two Digits of the width information. 60 for W:600mm cabinets, 80 for W:800mm cabinets
5. The First two Digits of the depth information, 60 for D:600mm cabinets, 80 for D:800mm cabinets, 10 for D:1000mm cabinets, 11 for D:1100mm cabinets, 12 for D:1200mm cabinets
6. Colour Codes. C1 for Light Gray RAL 7035. C2 for Black RAL 9005.
7. Front door variation number.*
8. Rear door variation number*
9. Right Side Panel variation number.*
10. Left Side Panel variation number..
11. Version information. A- Standart version. The version is changed alphabetically when any alteration made to the cabinet
12. Indicate how the cabinets' shipped. X1 for assembled, X2 for flat pack.

* YOU CAN CHECK THE DOOR OPTIONS FOR DOOR AND PANEL VARITIONS...

Free Standing A Series DOOR Options

- A Single Opening, Flat Shaped, Solid Metal, Snap Locking and Single point Locking with Barrel Lock, Panel.
- B Single Opening, Flat Shaped, Glass door with frame, Single Point Locking with Handle.
- C Single Opening, Flat Shaped, Complete Framed %63 Perforated, Metal Front Door, Single Point Locking with Handle.
- D Single Opening, Flat Shaped, Solid Metal Front Door, Single point Handled Locking
- E Double Opening, Flat Shaped, Glass door with frame, 2 Point Locking with Barrel Lock, Top and Bottom
- F Double Opening, Flat Shaped, Solid Metal Front Door, 3 Point Locking with Handle and Hinges
- G Double Opening, Flat Shaped, Complete Framed %63 Perforated, Metal Front Door, 3 Point Locking with Handle and Hinges
- H Single Opening, Flat Shaped, Glass Door with Complete Frame, Single Point Locking with Handle
- I Single Opening, Flat Shaped, Solid Metal Rear Door, Single point Locking with Barrel Lock, Top/Bottom Cable Entry Holes
- J Double Opening, Flat Shaped, Solid Metal Rear Door, 3 point Locking with Barrel Lock and Hinges, Top/Bottom Cable Entry Holes
- K Single Opening, Flat Shaped, Solid Metal Rear Door, Single point Locking with Barrel Lock,
- L Double Opening, Flat Shaped, Solid Metal Rear Door, 3 Point Locking with Barrel Lock and Hinges

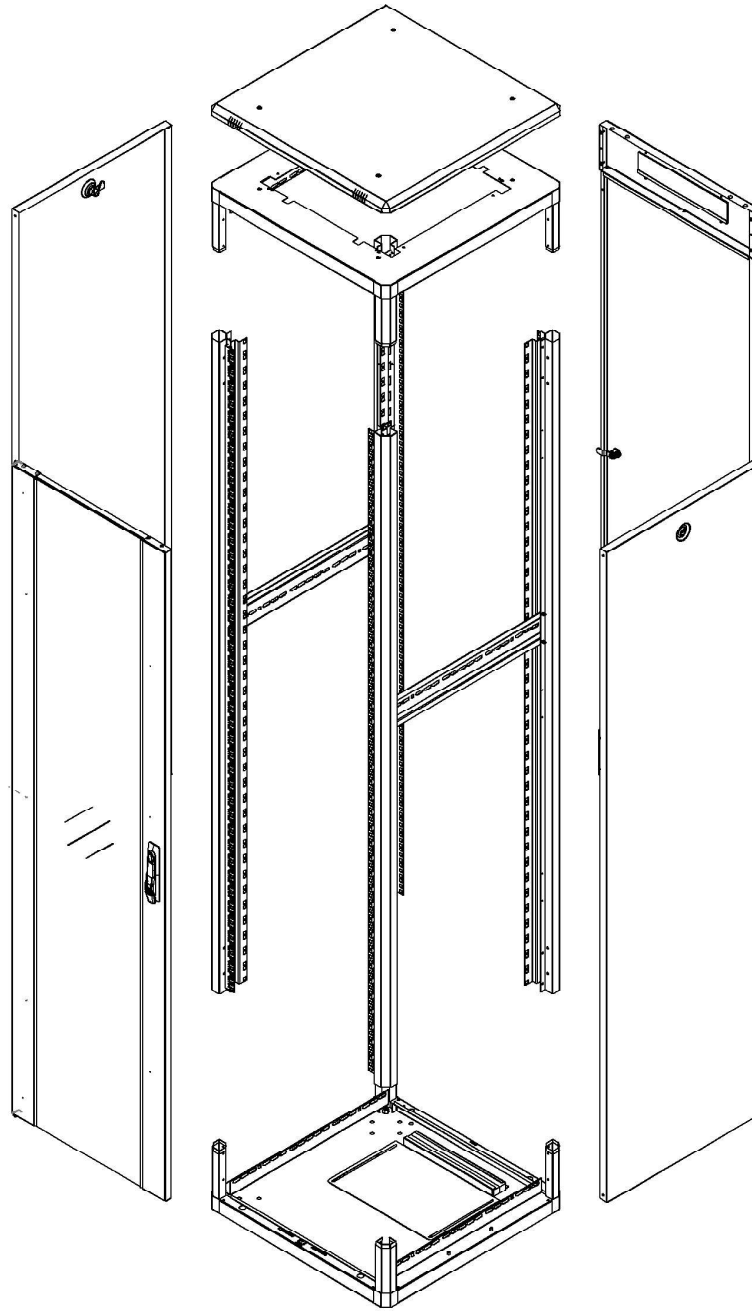

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg
- Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option

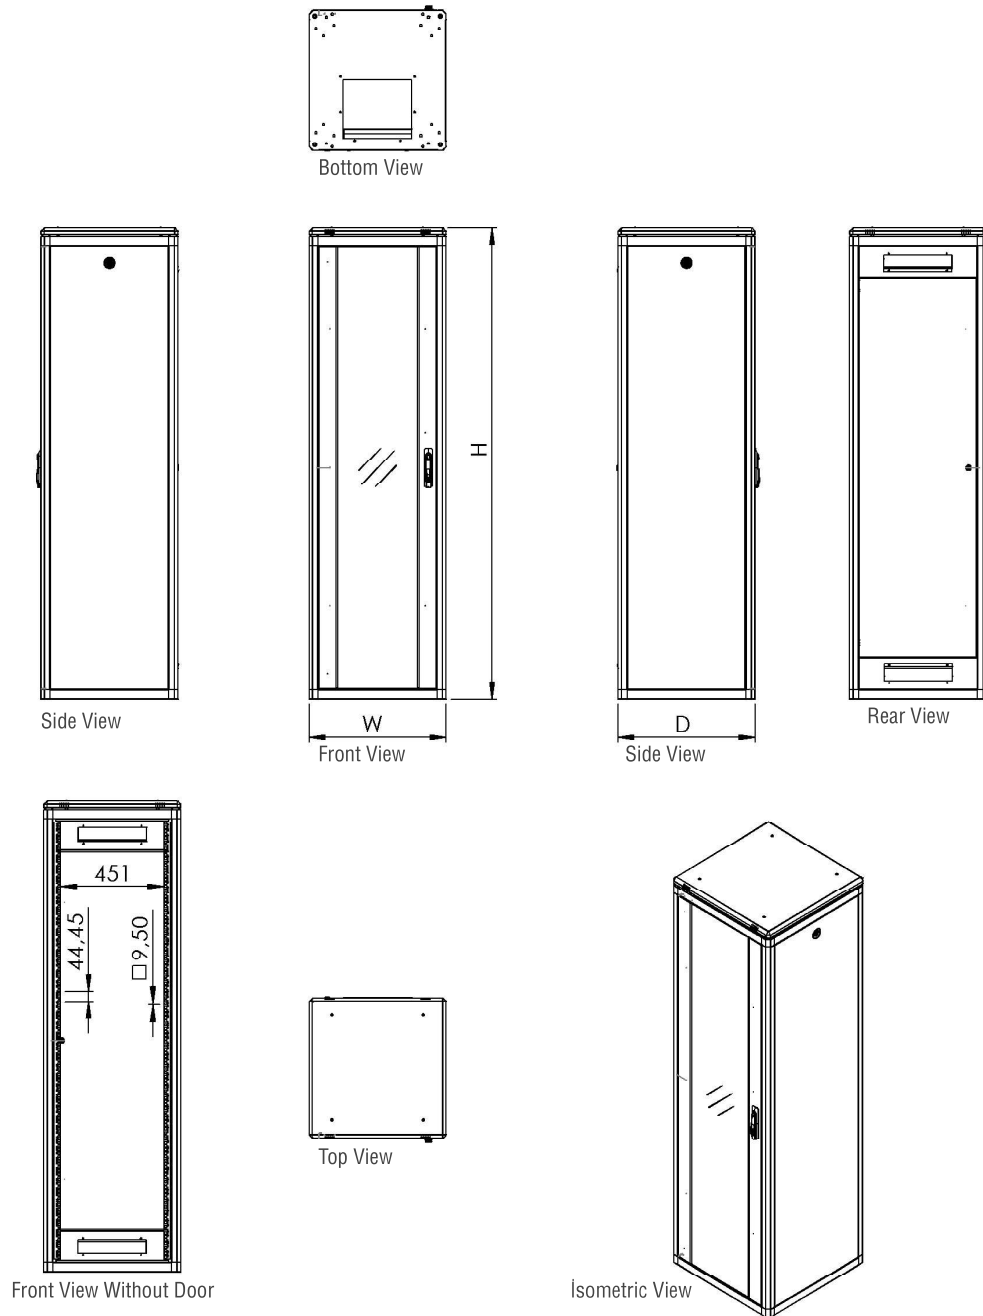

19" BOREAS A Series Free Standing Free Standing Cabinets W=600mm D=600mm

Product Code	Product Description	Height Size in U	Width (w) (mm)	Depth (d) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA12U6060CC-0000-A-XX	12U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	12U	600	600	679	50.7	57.9
BR-DTA16U6060CC-0000-A-XX	16U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	16U	600	600	856	55.9	63.5
BR-DTA20U6060CC-0000-A-XX	20U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	20U	600	600	1034	60.2	68.2
BR-DTA22U6060CC-0000-A-XX	22U 19" BOREAS A Series FreeStanding Cabinet W=600mm D=600mm	22U	600	600	1123	62.9	71.1
BR-DTA26U6060CC-0000-A-XX	26U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	26U	600	600	1300	67.7	76.3
BR-DTA32U6060CC-0000-A-XX	32U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	32U	600	600	1567	75.9	85.0
BR-DTA36U6060CC-0000-A-XX	36U 19" BOREAS A Series FreeStanding Cabinet W=600mm D=600mm	36U	600	600	1745	81.3	90.5
BR-DTA42U6060CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	42U	600	600	2012	88.7	98.9
BR-DTA45U6060CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	45U	600	600	2145	92.3	102.8
BR-DTA47U6060CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=600mm D=600mm	47U	600	600	2234	95.1	105.8

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

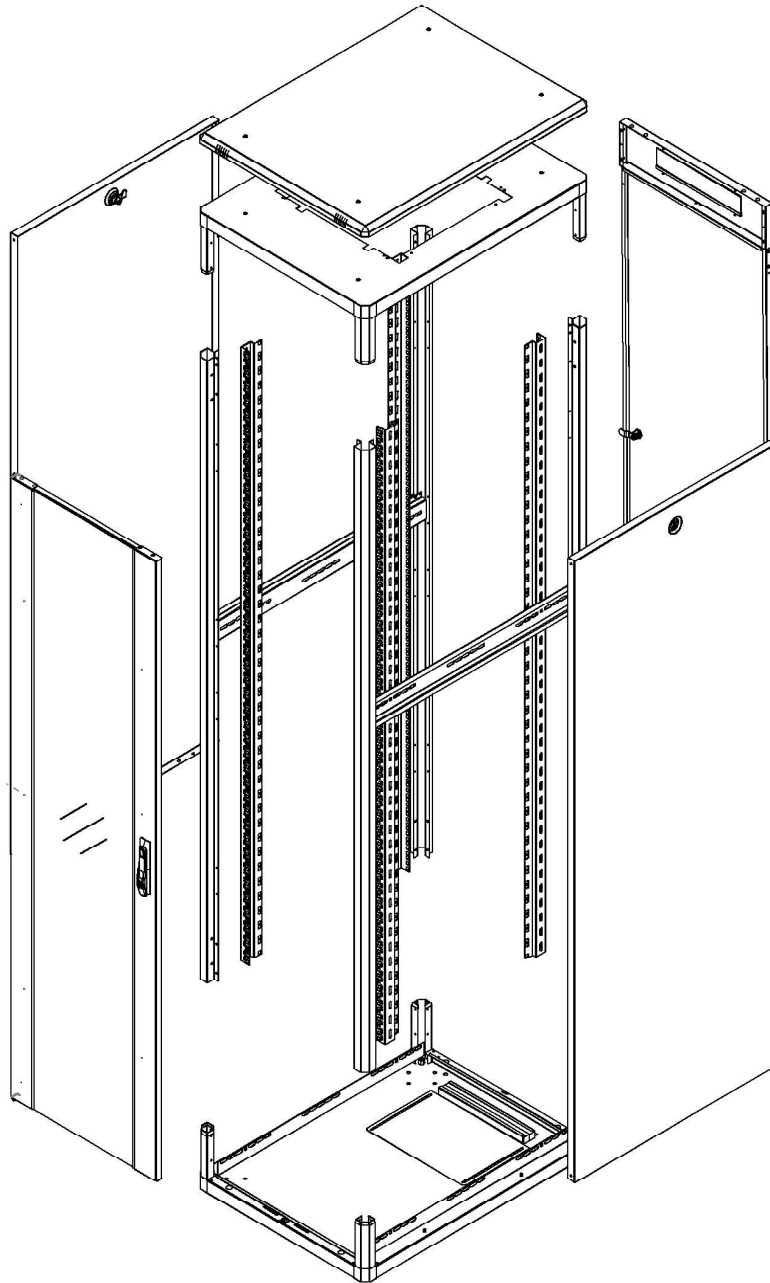

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact


- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option




Bottom View

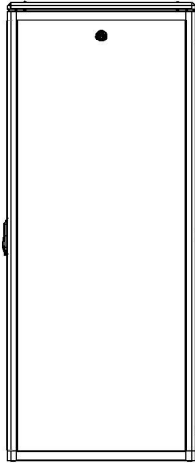


Side View

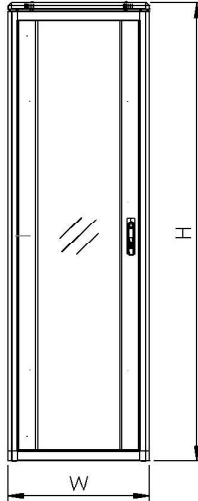


Front View

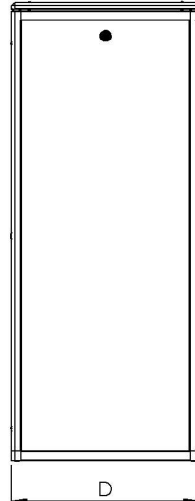


Side View

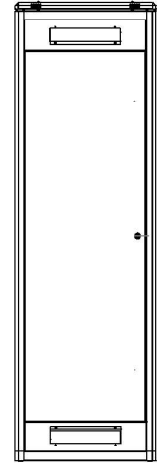


Rear View



Front View Without Door



Top View

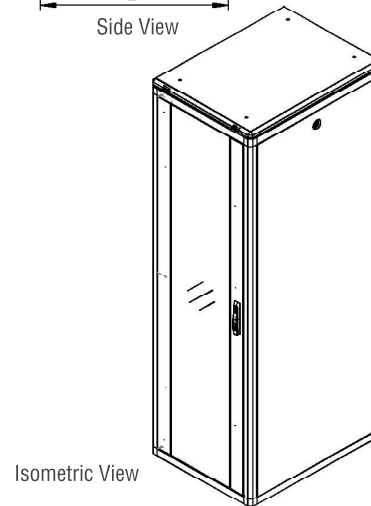


Isometric View

19" Boreas Free Standing Cabinetler W=600mm D=800mm

Product Code	Product Description	Height Size in (U)	Width (W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA12U6080CC-0000-A-XX	12U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	12U	600	800	678.5	57.2	64.6
BR-DTA16U6080CC-0000-A-XX	16U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	16U	600	800	856.3	63.0	70.9
BR-DTA20U6080CC-0000-A-XX	20U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	20U	600	800	1034.1	70.6	76.2
BR-DTA22U6080CC-0000-A-XX	22U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	22U	600	800	1123.0	73.6	79.2
BR-DTA26U6080CC-0000-A-XX	26U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	26U	600	800	1300.8	75.7	84.8
BR-DTA32U6080CC-0000-A-XX	32U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	32U	600	800	1567.5	85.0	94.9
BR-DTA36U6080CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	36U	600	800	1745.3	91.1	101.4
BR-DTA42U6080CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	42U	600	800	2012.0	98.7	109.7
BR-DTA45U6080CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	45U	600	800	2145.35	102.9	114.3
BR-DTA47U6080CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=600mm D=800mm	47U	600	800	2234.25	115.9	127.9

CC= Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice
 Please consider when used levelling feet 30mm add to Height, in castor add 80mm
 0000 = Please check the Door Options page
 XX = X1 for pre-assembled, X2 for flat pack

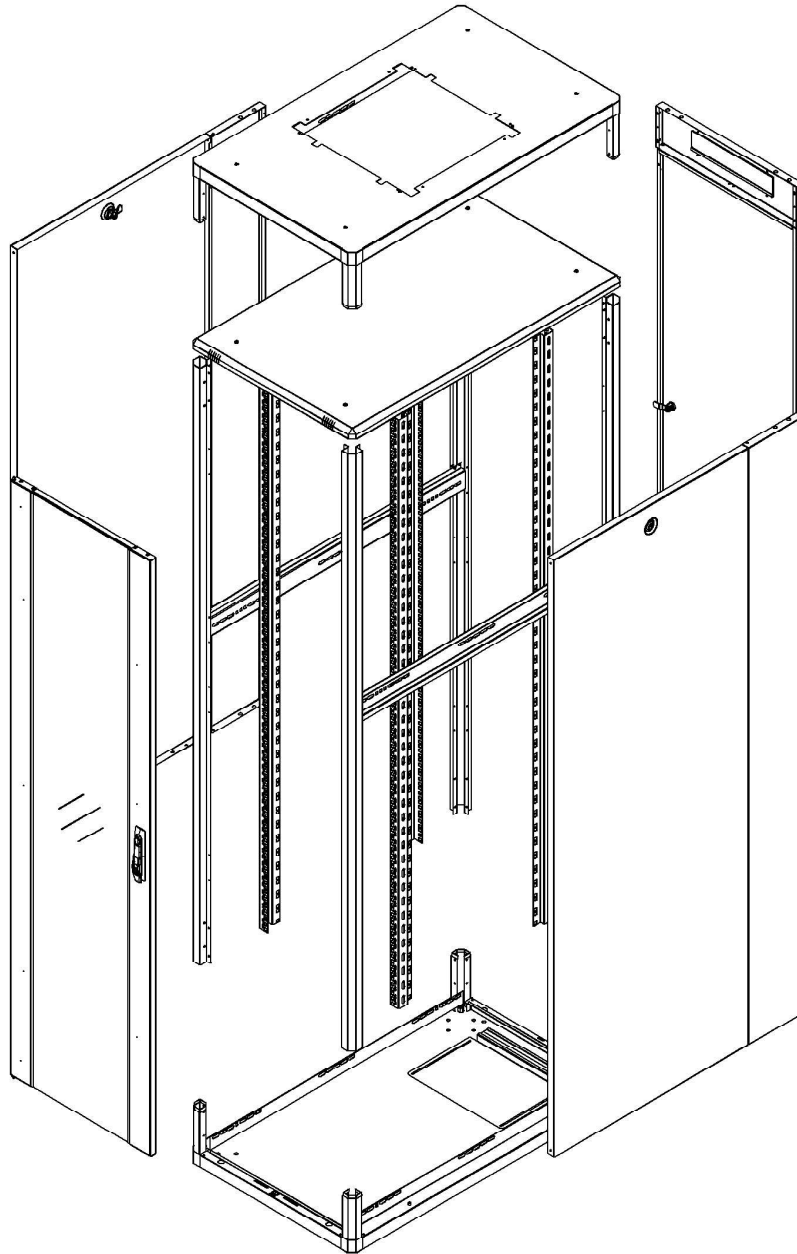

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid matel panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option

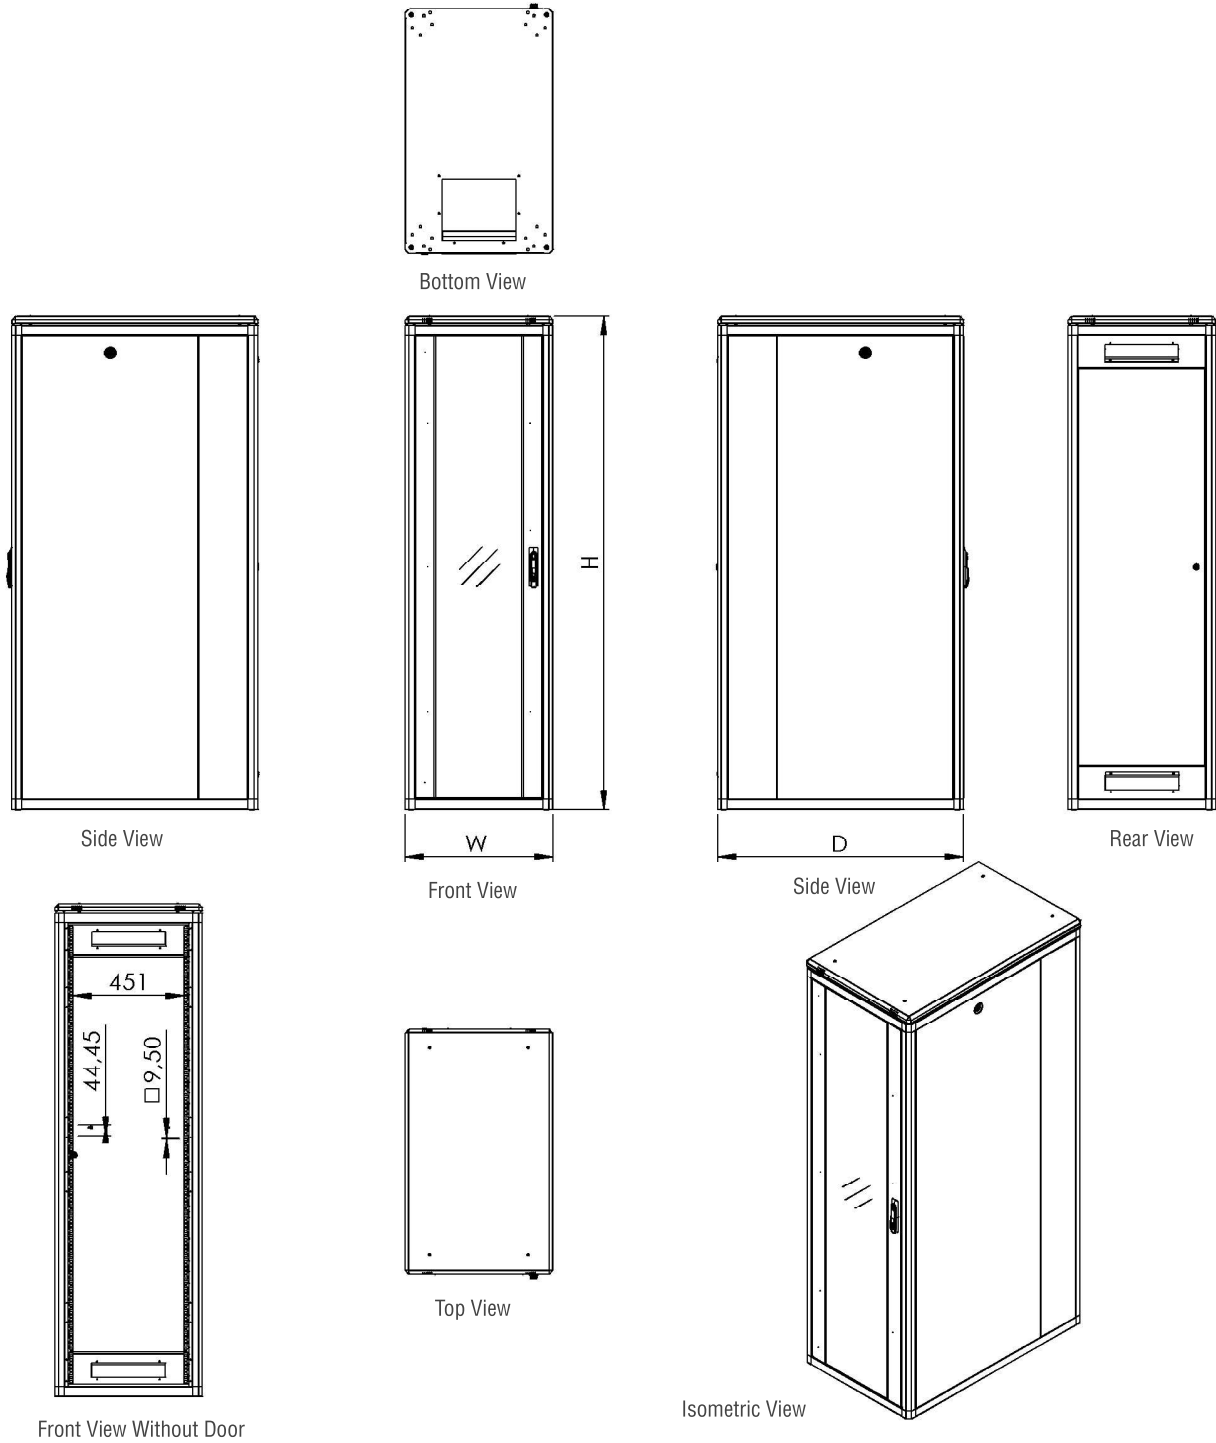

19" BOREAS A Series Free Standing Cabinetler W=600mm D=1000mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA22U6010CC-0000-A-XX	22U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	22U	600	1000	1123.0	89.0	92.0
BR-DTA26U6010CC-0000-A-XX	26U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	26U	600	1000	1300.8	92.0	95.5
BR-DTA32U6010CC-0000-A-XX	32U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	32U	600	1000	1567.5	104.3	108.7
BR-DTA36U6010CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	36U	600	1000	1745.3	112.0	117.0
BR-DTA42U6010CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	42U	600	1000	2012.0	122.0	127.9
BR-DTA45U6010CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	45U	600	1000	2145.35	125.0	132.1
BR-DTA47U6010CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1000mm	47U	600	1000	2234.25	127.0	133.1

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice
 Please consider when used levelling feet 30mm add to Height, in castor add 80mm
 0000 = Please check the Door Options page
 XX= X1 for pre-assembled, X2 for flat pack

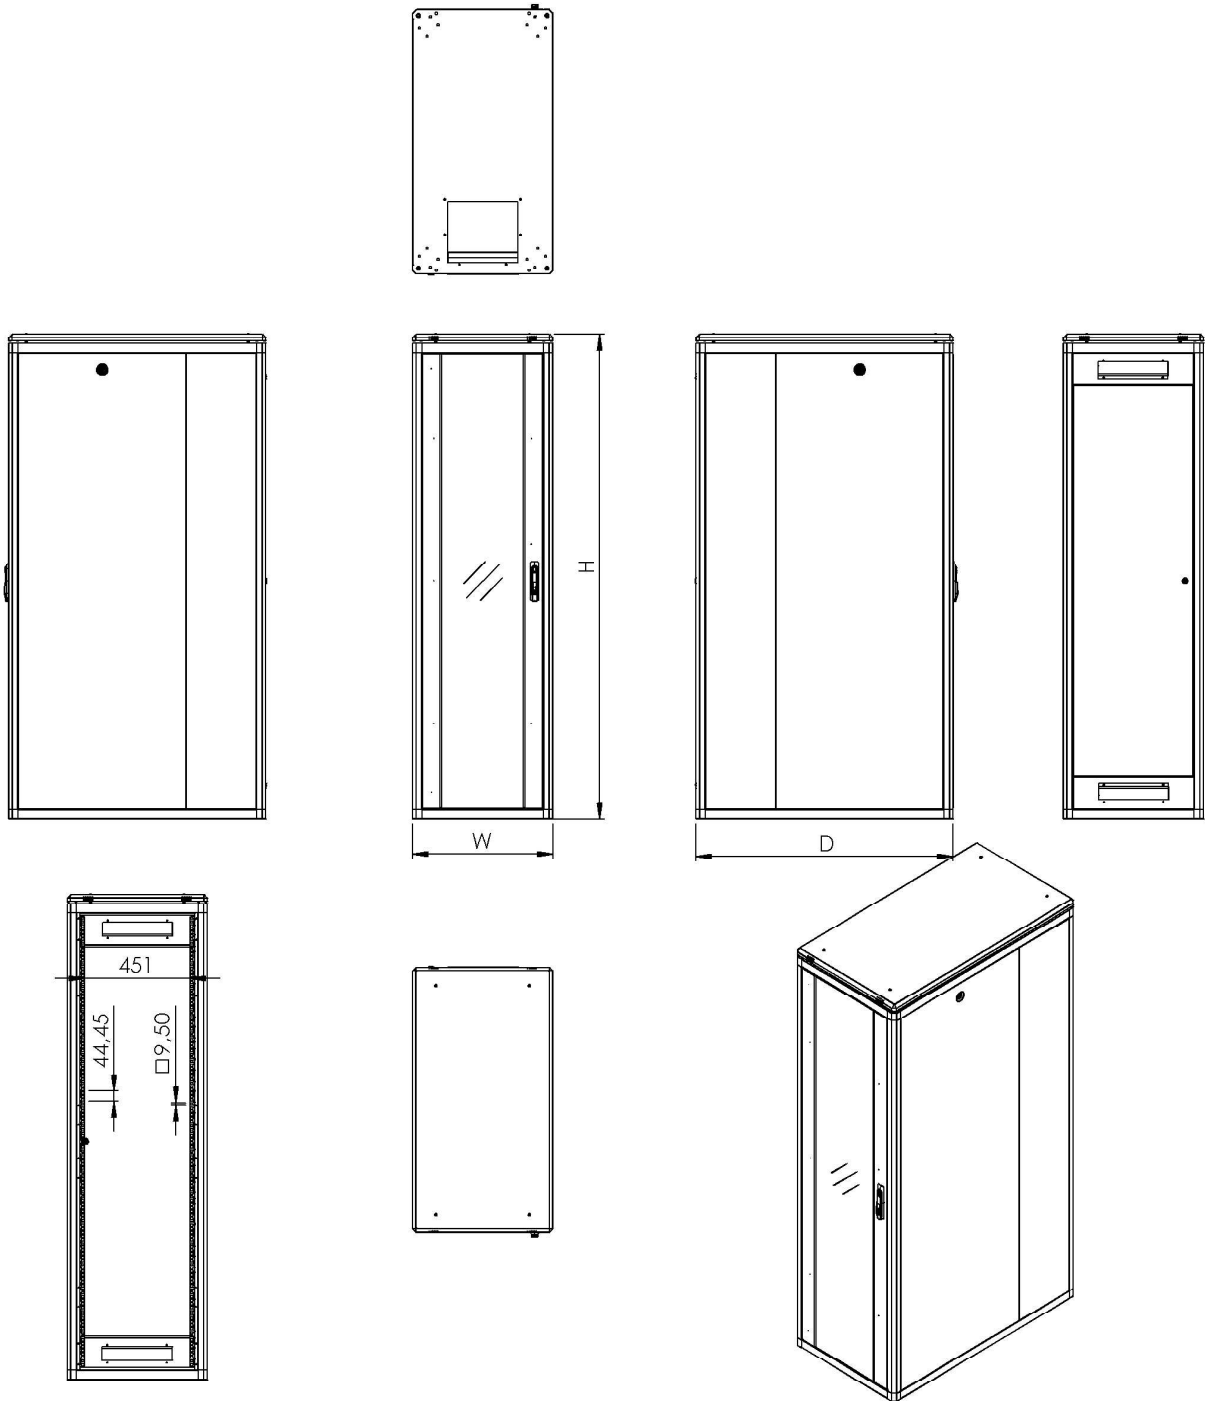

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid matel panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg
- Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available,
- Side panels are removable.

Bottom

- Sliding cable panel

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option

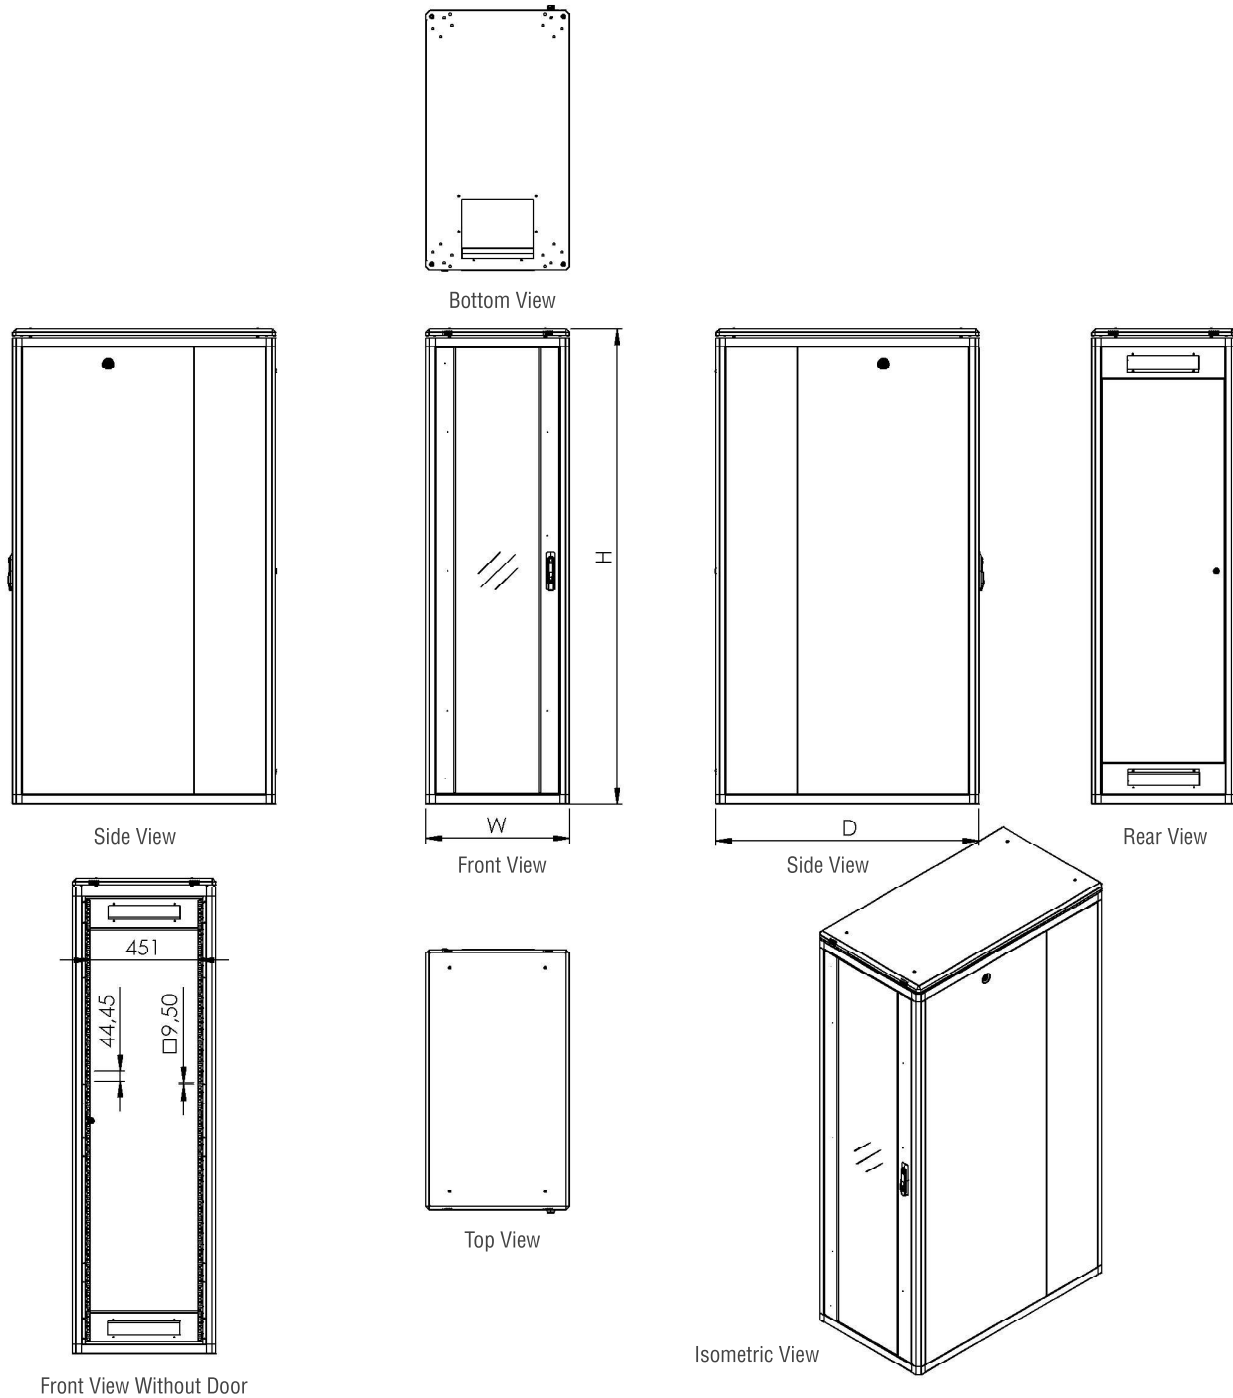

19" BOREAS A Series Free Standing Cabinetler W=600mm D=1100mm

Product Code	Product Description	Height Size in (U)	Width (mm)	Depth (mm)	Height (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA36U6011CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1100mm	36U	600	1100	1745.3	112.0	117.0
BR-DTA42U6011CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1100mm	42U	600	1100	2012.0	122.0	127.9
BR-DTA45U6011CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1100mm	45U	600	1100	2145.35	125.0	132.1
BR-DTA47U6011CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1100mm	47U	600	1100	2234.25	127.0	133.1

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

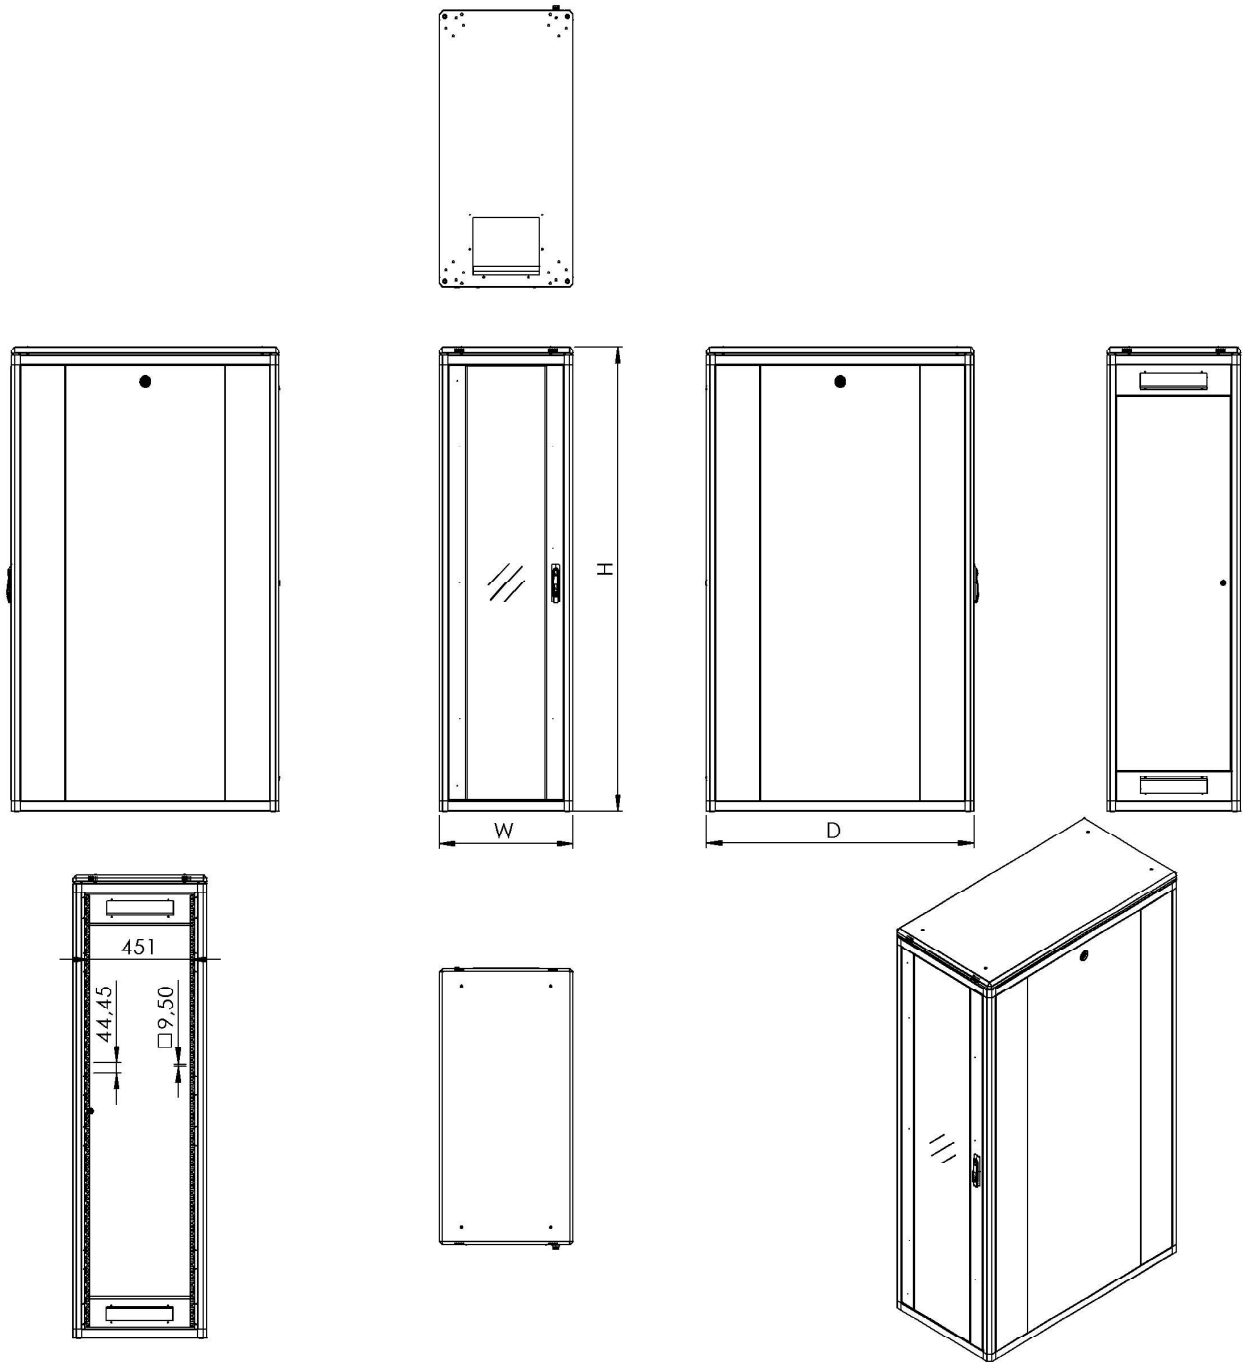

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid matel panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet

- Fan module is available as an option

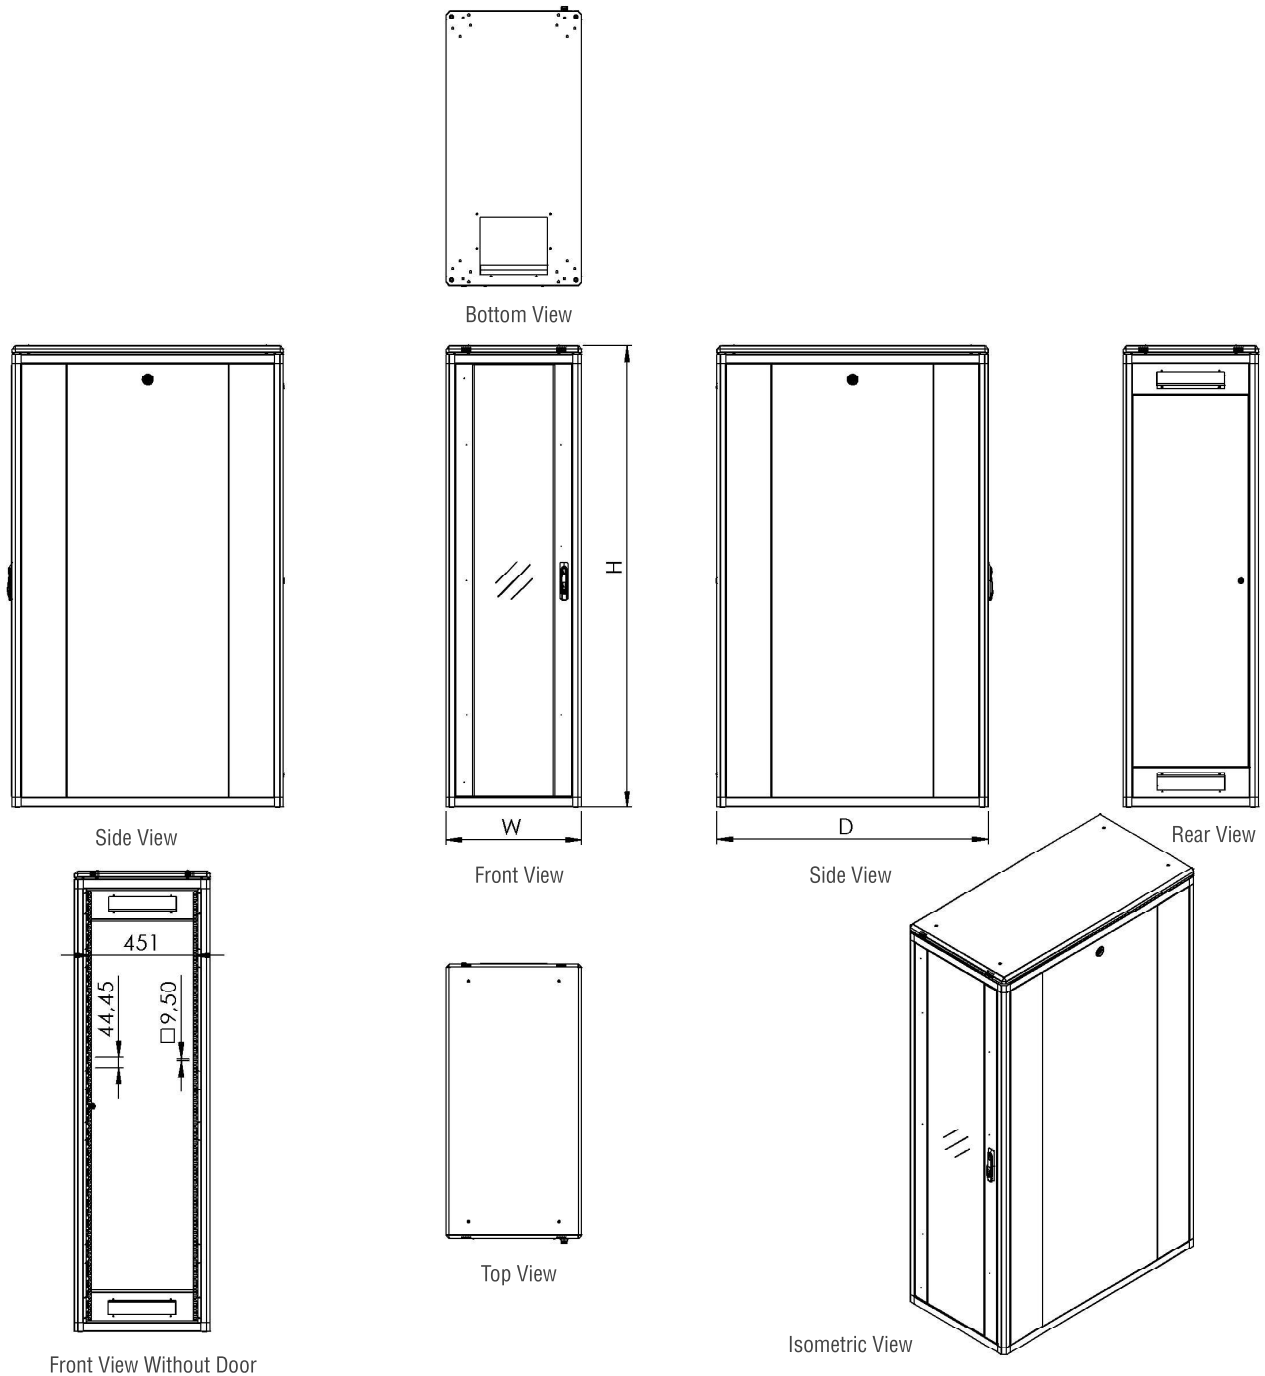


19" BOREAS A Series Free Standing Cabinet W=600mm D=1200mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA36U6012CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1200mm	36U	600	1200	1745.3	112.0	117.0
BR-DTA42U6012CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1200mm	42U	600	1200	2012.0	122.0	127.9
BR-DTA45U6012CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1200mm	45U	600	1200	2145.35	125.0	132.1
BR-DTA47U6012CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=600mm D=1200mm	47U	600	1200	2234.25	127.0	133.1

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack



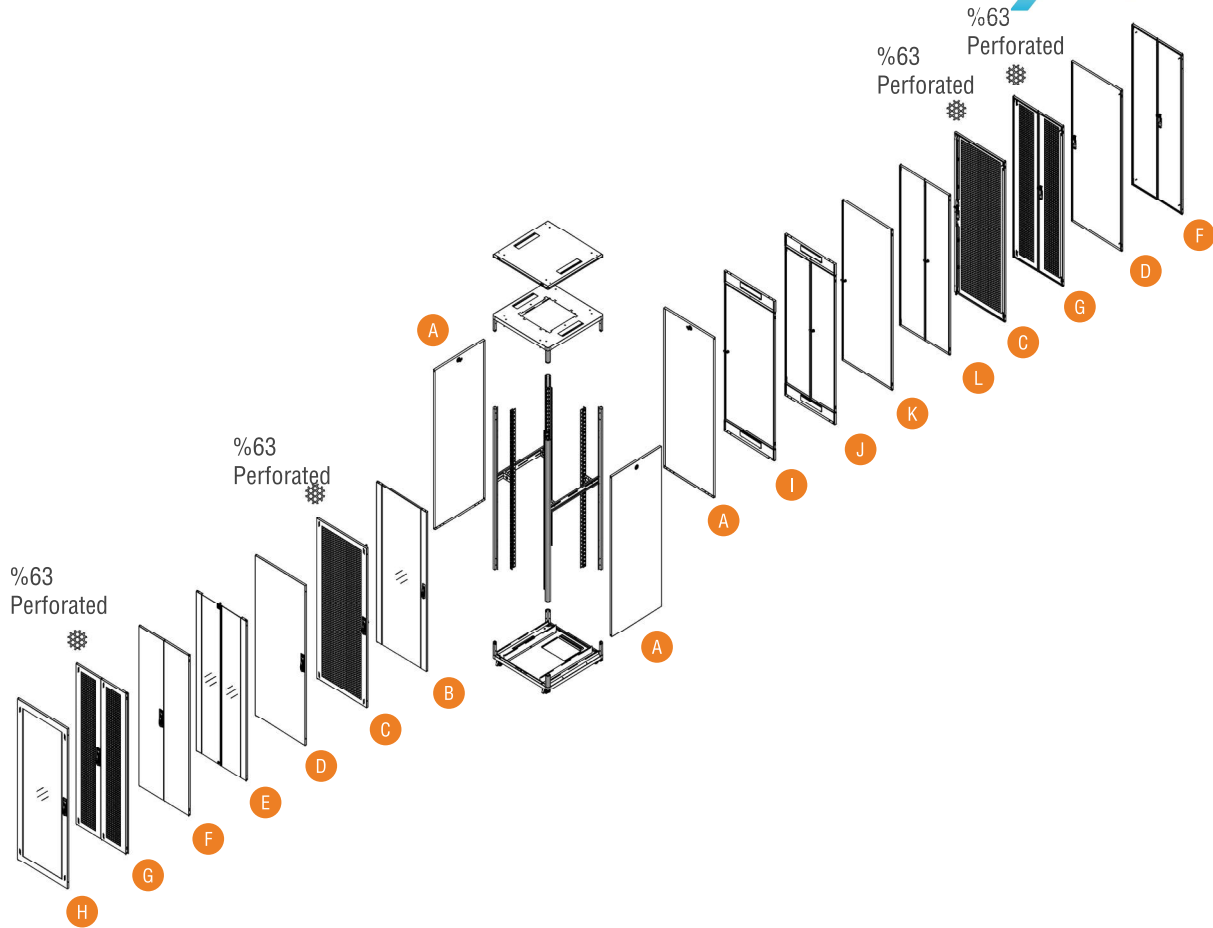

BR	DTA	42U	80	60	C1	B	J	A	A	A	X1
1	2	3	4	5	6	7	8	9	10	11	12

1. Company product coding system's initial character is BR that stands for BOREAS.

2. Product Series Code. DTA stands for A Series Free-Standing,

3. Numeric Character defining the height of the cabinet. Depending on model differences, between 07 to 48 height variety available. U Height Alphanumeric Notation is fixed, not editable. 1U is 44.45mm.

4. The First two Digits of the width information. 60 for W:600mm cabinets, 80 for W:800mm cabinets

5. The First two Digits of the depth information, 60 for D:600mm cabinets, 80 for D:800mm cabinets, 10 for D:1000mm cabinets, 11 for D:1100mm cabinets, 12 for D:1200mm cabinets

6. Colour Codes. C1 for Light Gray RAL 7035. C2 for Black RAL 9005.

7. Front door variation number.*

8. Rear door variation number*

9. Right Side Panel variation number.*

10. Left Side Panel variation number..

11. Version information. A- Standart version. The version is changed alphabetically when any alteration made to the cabinet

12. Indicate how the cabinets' shipped. X1 for assembled, X2 for flat pack.

* YOU CAN CHECK THE DOOR OPTIONS FOR DOOR AND PANEL VARIATIONS...

Free Standing A Series DOOR Options

A Single Opening, Flat Shaped, Solid Metal, Snap Locking and Single point Locking with Barrel Lock, Panel.

B Single Opening, Flat Shaped, Glass door with frame, Single Point Locking with Handle.

C Single Opening, Flat Shaped, Complete Framed %63 Perforated, Metal Front Door, Single Point Locking with Handle.

D Single Opening, Flat Shaped, Solid Metal Front Door, Single point Handled Locking

E Double Opening, Flat Shaped, Glass door with frame, 2 Point Locking with Barrel Lock, Top and Bottom

F Double Opening, Flat Shaped, Solid Metal Front Door, 3 Point Locking with Handle and Hinges

G Double Opening, Flat Shaped, Complete Framed %63 Perforated, Metal Front Door, 3 Point Locking with Handle and Hinges


H Single Opening, Flat Shaped, Glass Door with Complete Frame, Single Point Locking with Handle

I Single Opening, Flat Shaped, Solid Metal Rear Door, Single point Locking with Barrel Lock, Top/Bottom Cable Entry Holes

J Double Opening, Flat Shaped, Solid Metal Rear Door, 3 point Locking with Barrel Lock and Hinges, Top/Bottom Cable Entry Holes

K Single Opening, Flat Shaped, Solid Metal Rear Door, Single point Locking with Barrel Lock,

L Double Opening, Flat Shaped, Solid Metal Rear Door, 3 Point Locking with Barrel Lock and Hinges

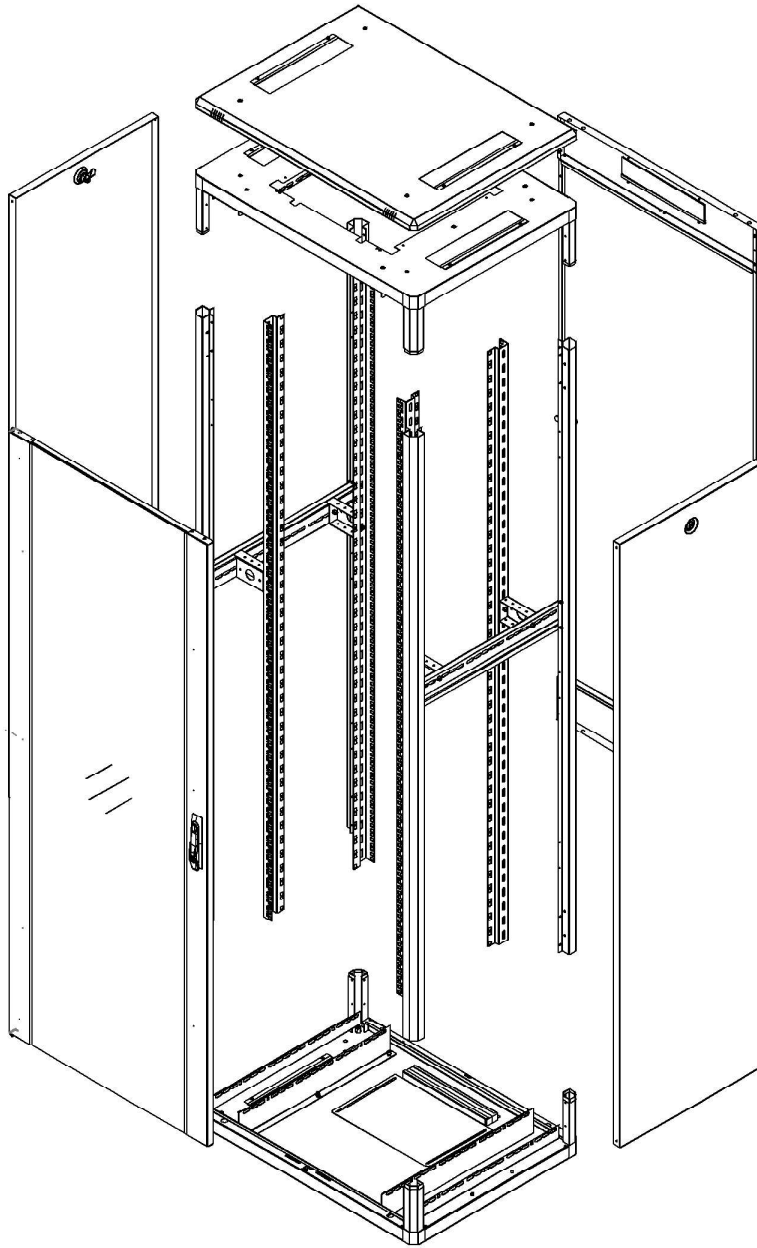

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg
- Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel and brushed cable entry

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact


- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option




Bottom View

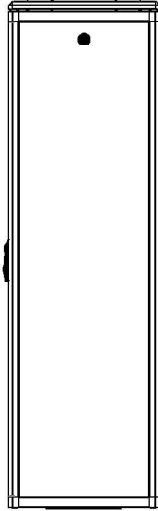


Side View

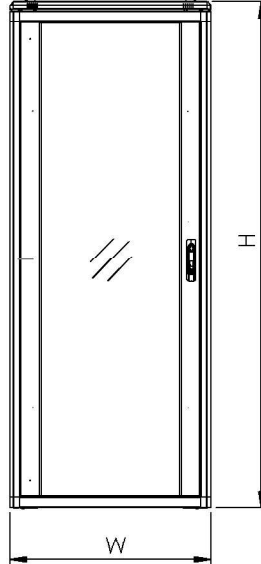


Front View

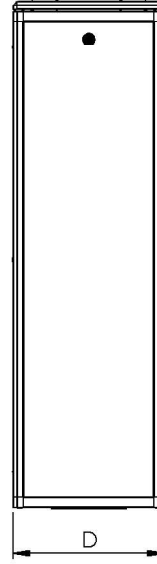


Side View

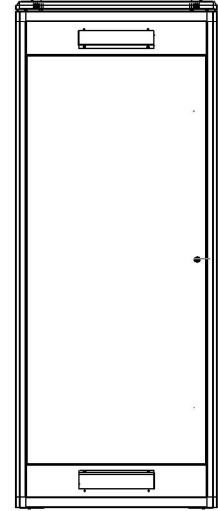


Rear View

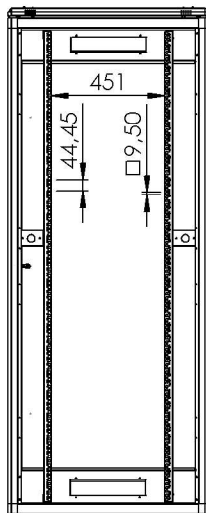

Front View Without Door



Top View

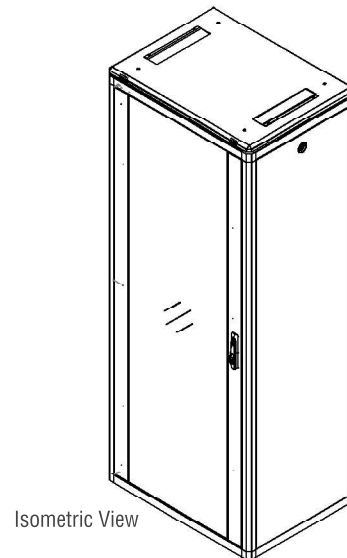


Isometric View

19" BOREAS A Series Free Standing Cabinetler W=800mm D=600mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA22U8060CC-0000-A-XX	22U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	22U	800	600	1123.0	71.5	80.0
BR-DTA26U8060CC-0000-A-XX	26U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	26U	800	600	1300.8	76.7	86.0
BR-DTA32U8060CC-0000-A-XX	32U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	32U	800	600	1567.5	86.4	96.0
BR-DTA36U8060CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	36U	800	600	1745.3	92.5	103.0
BR-DTA42U8060CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	42U	800	600	2012.0	100.6	111.7
BR-DTA45U8060CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	45U	800	600	2145.35	104.8	116.3
BR-DTA47U8060CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=800mm D=600mm	47U	800	600	2234.25	107.7	119.6

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

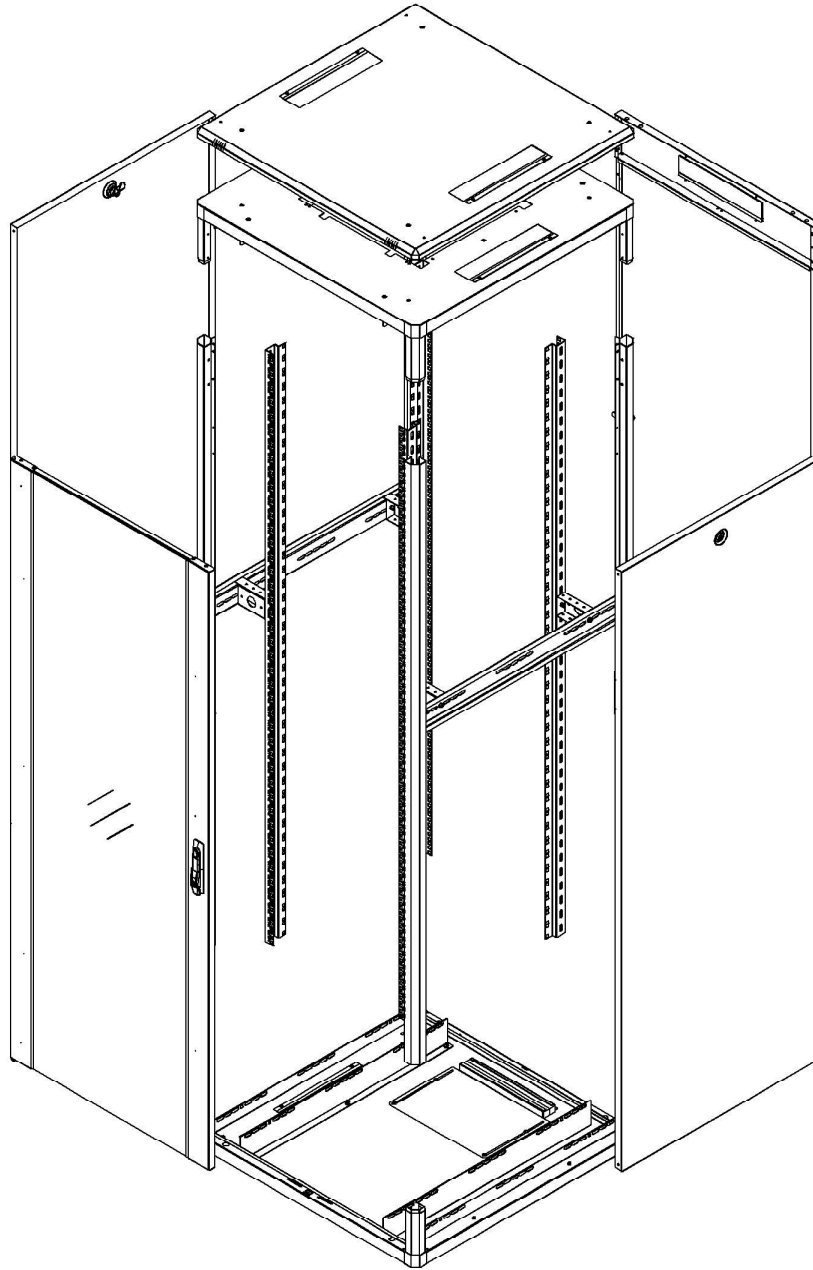

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel and brushed cable entry

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact


- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option




Bottom View

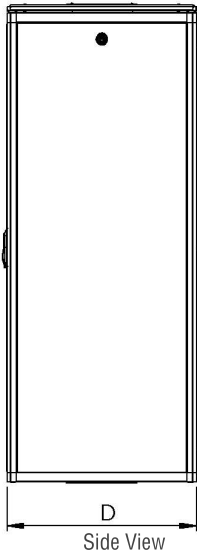


Side View

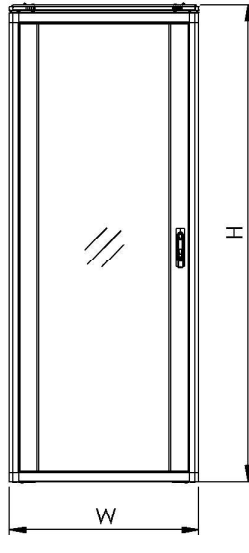


Front View

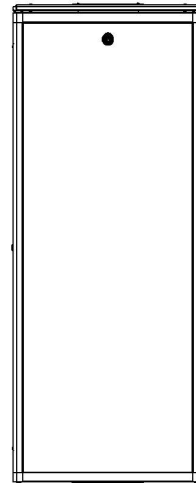


Side View

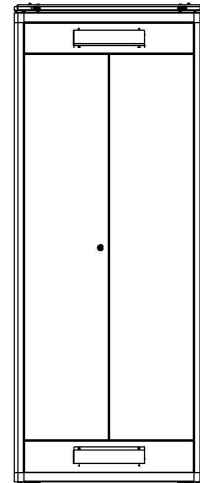


Rear View

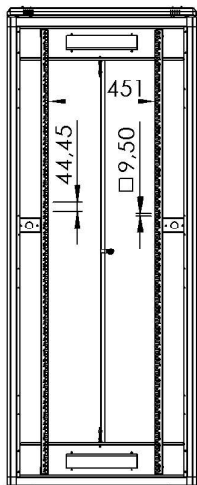

Front View Without Door



Top View

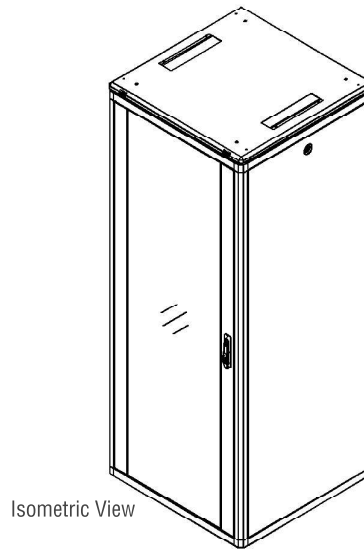


Isometric View

19" BOREAS A Series Free Standing Cabinetler W=800mm D=800mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA22U8080CC-0000-A-XX	22U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	22U	800	800	1123.0	79.3	92.5
BR-DTA26U8080CC-0000-A-XX	26U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	26U	800	800	1300.8	85	98.8
BR-DTA32U8080CC-0000-A-XX	32U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	32U	800	800	1567.5	95.4	99.9
BR-DTA36U8080CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	36U	800	800	1745.3	102	117.2
BR-DTA42U8080CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	42U	800	800	2012.0	111	126.3
BR-DTA45U8080CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	45U	800	800	2145.35	115	131.6
BR-DTA47U8080CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=800mm D=800mm	47U	800	800	2234.25	119	136.3

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

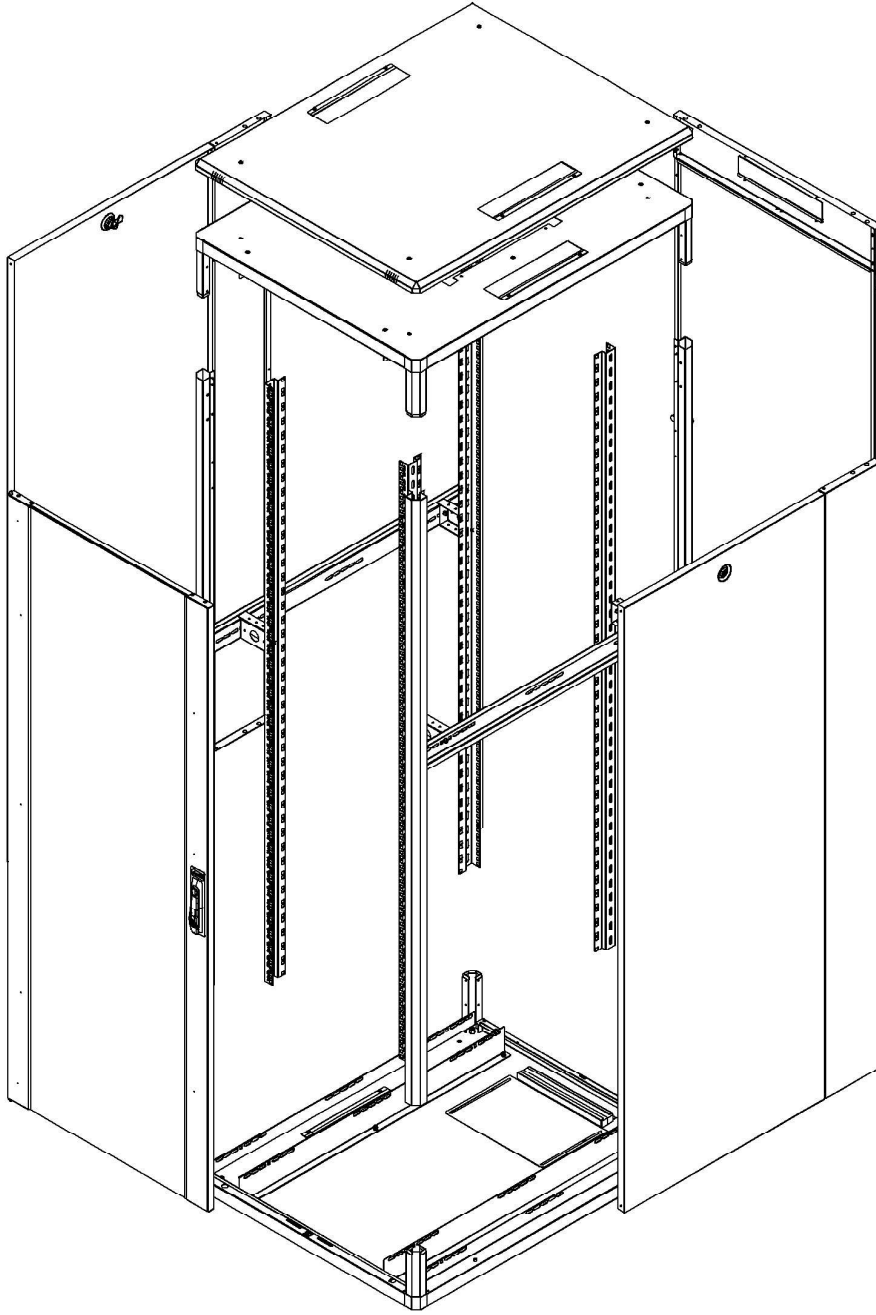

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel and brushed cable entry

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact


- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option




Bottom View

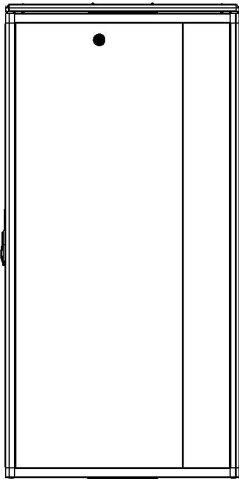


Side View

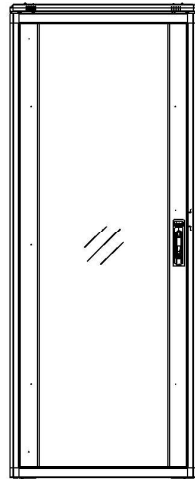


Front View

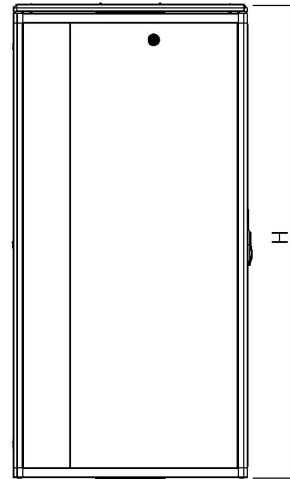


Side View

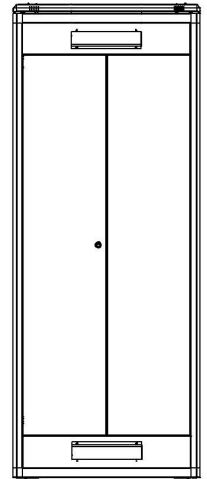


Rear View

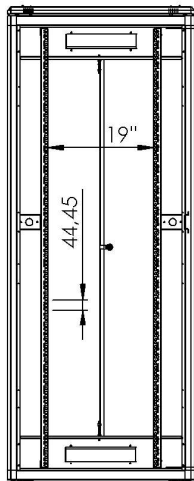

Front View Without Door



Top View

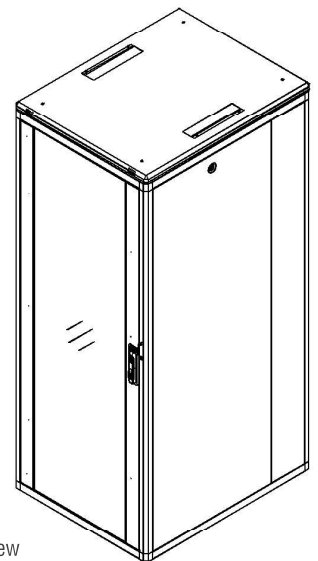


Isometric View

19" BOREAS A Series Free Standing Cabinetler W=800mm D=1000mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA36U8010CC-0000-A-XX	36U 19" BOREAS A Series Free Standing Cabinet W=800mm D=1000mm	36U	800	1000	1745.3	114	130.03
BR-DTA42U8010CC-0000-A-XX	42U 19" BOREAS A Series Free Standing Cabinet W=800mm D=1000mm	42U	800	1000	2012.0	133.0	151.7
BR-DTA45U8010CC-0000-A-XX	45U 19" BOREAS A Series Free Standing Cabinet W=800mm D=1000mm	45U	800	1000	2145.35	138.5	157.7
BR-DTA47U8010CC-0000-A-XX	47U 19" BOREAS A Series Free Standing Cabinet W=800mm D=1000mm	47U	800	1000	2234.25	142.0	161.7

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

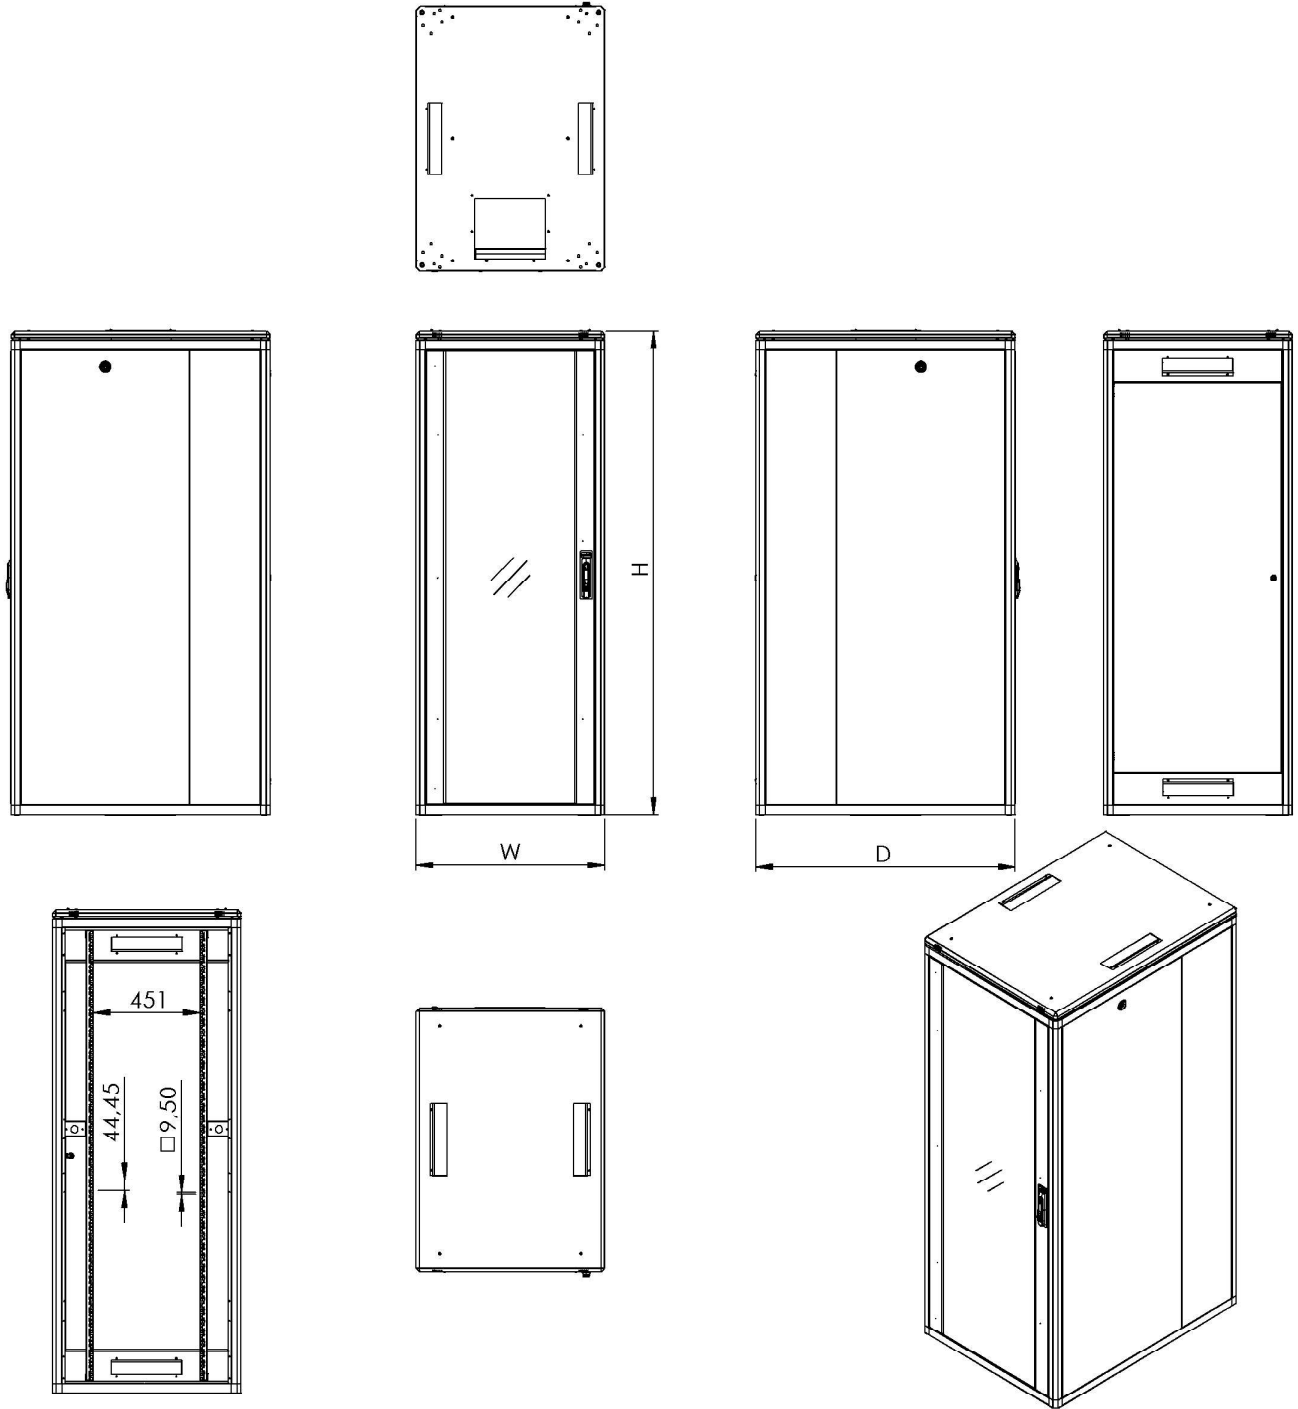

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel and brushed cable entry

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet


- Fan module is available as an option

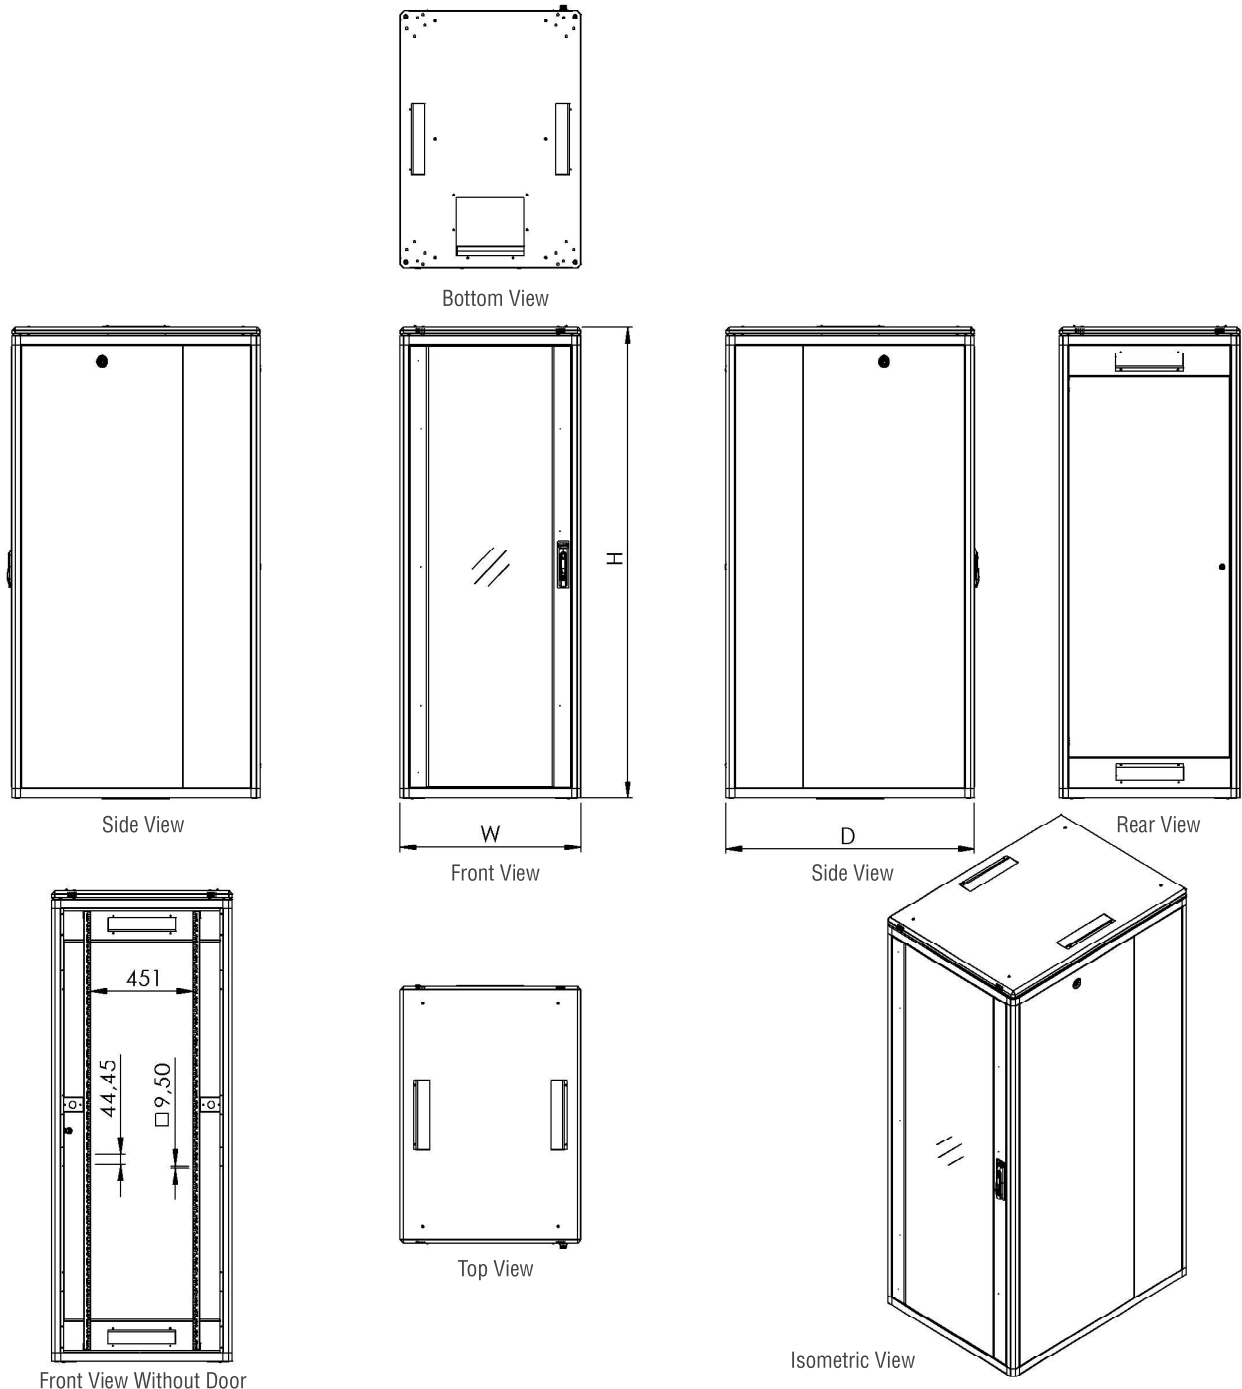

19" BOREAS A Series Free Standing Cabinet W=800mm D=1100mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA36U8011CC-0000-A-XX 36U 19"	BOREAS A Series Free Standing Cabinet W=800mm D=1100mm	36U	800	1100	1745.3	102	117.2
BR-DTA42U8011CC-0000-A-XX 42U 19"	BOREAS A Series Free Standing Cabinet W=800mm D=1100mm	42U	800	1100	2012.0	111	126.3
BR-DTA45U8011CC-0000-A-XX 45U 19"	BOREAS A Series Free Standing Cabinet W=800mm D=1100mm	45U	800	1100	2145.35	115	131.6
BR-DTA47U8011CC-0000-A-XX 47U 19"	BOREAS A Series Free Standing Cabinet W=800mm D=1100mm	47U	800	1100	2234.25	119	136.3

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack

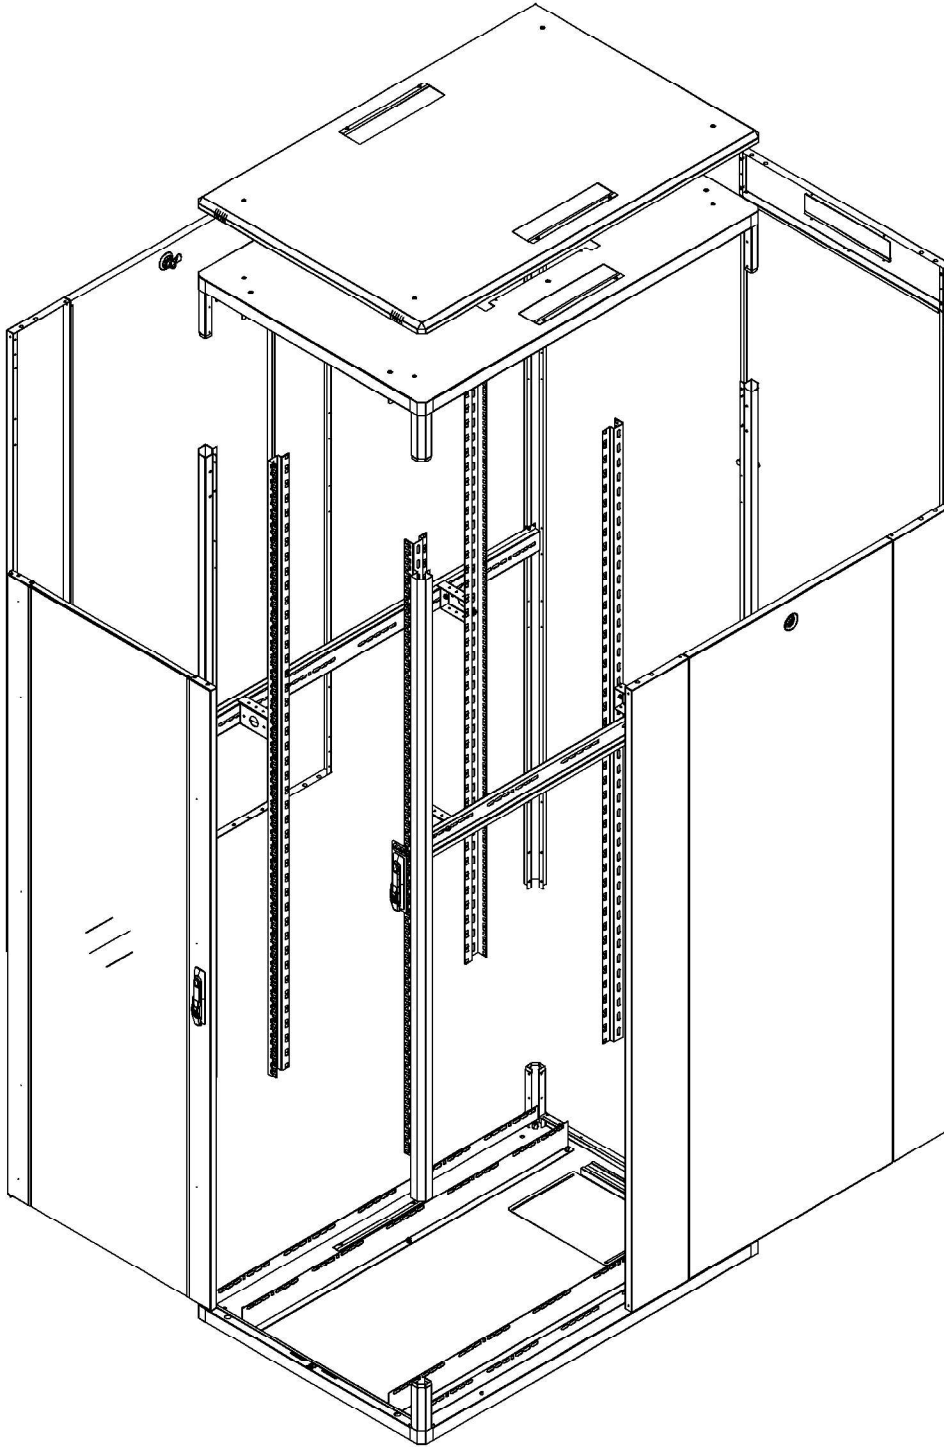

Material

- 1.2 mm DKP

IP Classification

- As a standard IP20
- IP40 when solid metal panel applied for all access

Color Options

- RAL9005 Black
- RAL7035 White

Loading Capacity

- Recommended up to 1000 kg Loading capacity

Doors

- Door options are available.
- Single point locking system
- Doors can be opened to 110 degree.
- Doors can be opened to left or right direction

Mounting Rails

- 19" Mounting rails; adjustable in depth of the cabinet
- 1.5mm DX51D+ZN275 galvanic

Side Panels

- Locking system is available, Side panels are removable.

Bottom

- Sliding cable panel and brushed cable entry

Rear Door


- Brushed cable entry holes available bottom and top side of rear door
- Rear door is lockable.
- Rear door options are available

Ground contact

- Caster and levelling feet options are available
- Plinth is available as an option.

Top Sheet

- Fan module is available as an option

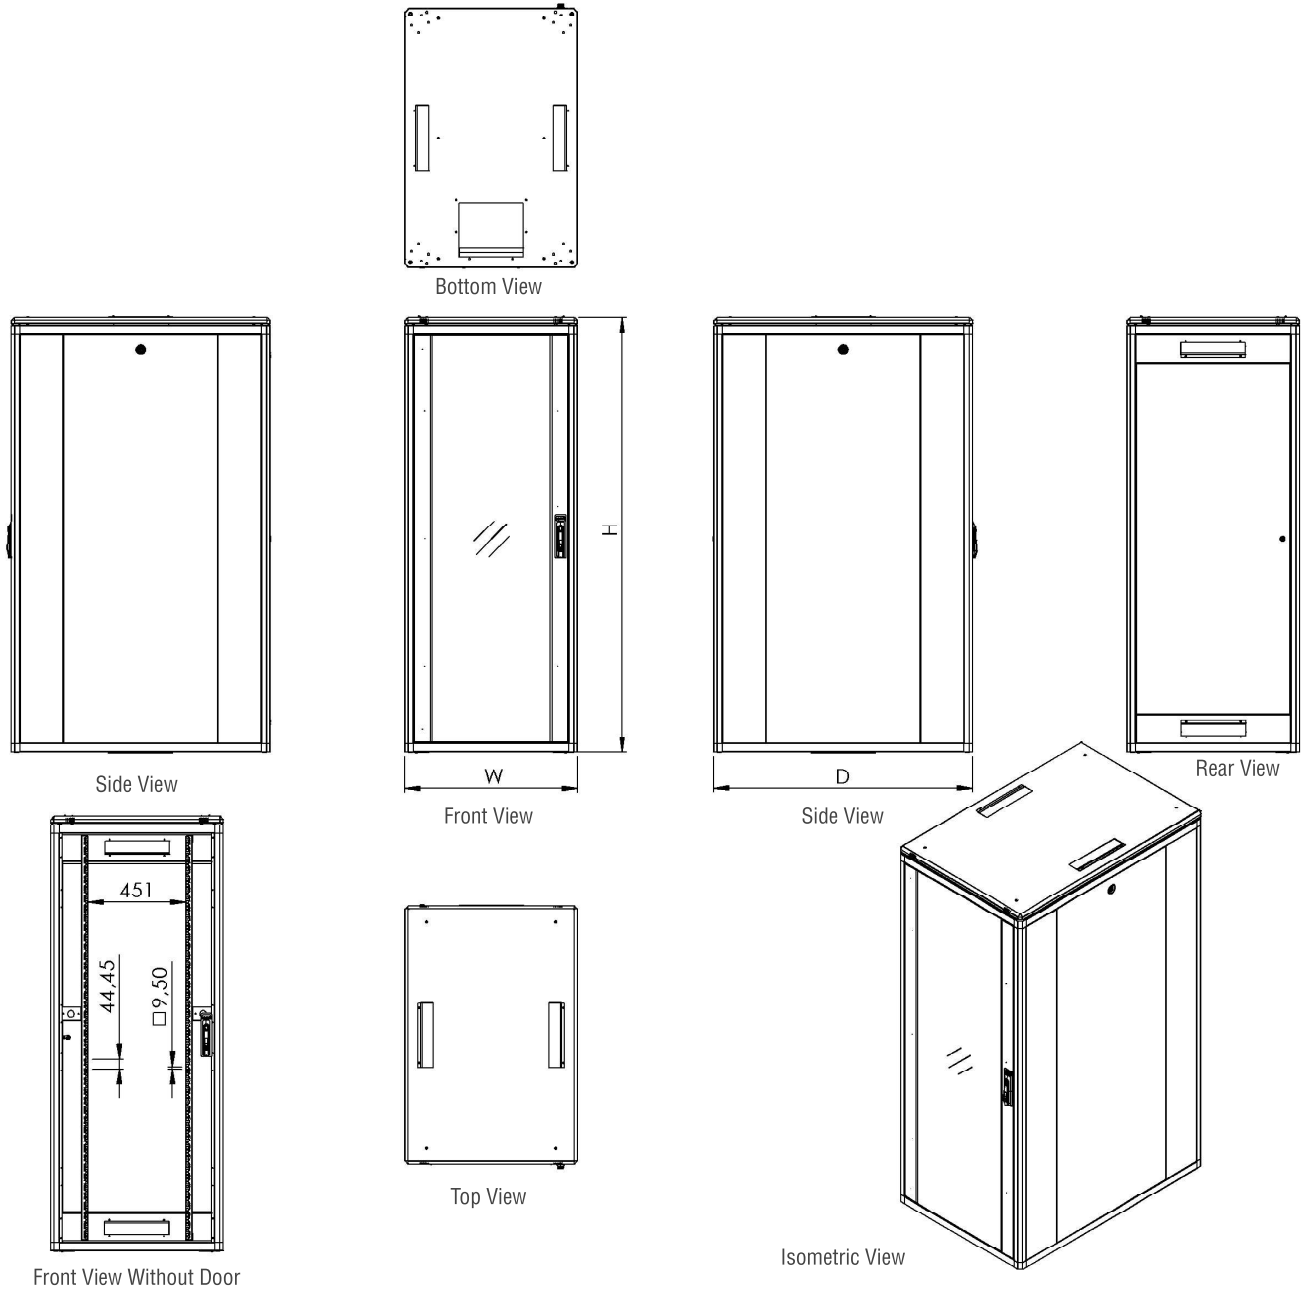

19" BOREAS A Series Free Standing Cabinetler W=800mm D=1200mm

Product Code	Product Description	Height Size in (U)	Width(w) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
BR-DTA36U8012CC-0000-A-XX	36U 19" BOREAS A Series Standing Cabinet W=800mm D=1200mm	36U	800	1200	1745.3	102	117.2
BR-DTA42U8012CC-0000-A-XX	42U 19" BOREAS A Series Standing Cabinet W=800mm D=1200mm	42U	800	1200	2012.0	111	126.3
BR-DTA45U8012CC-0000-A-XX	45U 19" BOREAS A Series Standing Cabinet W=800mm D=1200mm	45U	800	1200	2145.35	115	131.6
BR-DTA47U8012CC-0000-A-XX	47U 19" BOREAS A Series Standing Cabinet W=800mm D=1200mm	47U	800	1200	2234.25	119	136.3

CC = Colour Code, C1 White RAL 7035, C2 Black RAL 9005, during order please specify the colour choice Please consider when used levelling feet 30mm add to Height, in castor add 80mm
0000 = Please check the Door Options page
XX= X1 for pre-assembled, X2 for flat pack